



SmartCap[™] IM 850

High-Temperature Isolated Media Pressure Sensor

Unprecedented capabilities in the world's harshest environments

WORK HOTTER AND SMARTER

The SmartCap IM[™] 850 capacitive sensor simultaneously measures pressure and temperature in extremely demanding ultra-high temperature applications.



Harsh Environment

Including up to 850°C and corrosive environments



High Bandwidth

Visibility into high-frequency pressure phenomena up to 17 kHz



Smart

Calibrated digital data with onboard processing.

Key Features

- Compatible for use in a harsh corrosive gas and liquid media
- In-situ capabilities enable real-time, accurate measurements
- Operates in extreme environments
- Access to previously unavailable measurement data
- Pressure and temperature outputs
- Modifiable packaging to meet most mounting specifications
- Smart line-replaceable unit (LRU) features
- Digital interface – Easy to install/set up
- Static pressures up to 1500 psi

continued...






SmartCap™ IM 850

High-Temperature High-Speed Pressure Sensor

WORK HOTTER AND SMARTER

Technical Specifications

Part # 940-000-0349-00

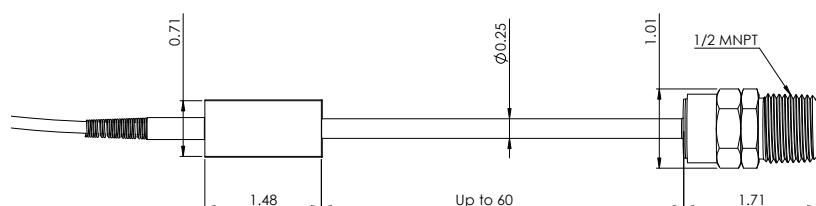

Default configuration shown.
Custom packaging available upon request.

Measurements are in inches.

Performance

Pressure Measurement Accuracy	+/- 0.2%FS to 600°C +/- 1%FS to 850°C
Temperature Measurement Accuracy	+/- 1°C, integrated K-type thermocouple
Pressure Measurement Resolution*	Down to 0.5 PSI or better
Temperature Measurement Resolution	0.1°C
Proof Pressure.....	1.5x max measurement pressure
Sensing Element Mechanical Resonance.....	>100 kHz
Burst Pressure.....	3000 psi minimum

* Dependent upon temperature and pressure measurement range design

Physical

Weight*	210 grams nominal
Inline Electronics Temperature	-30°C to 105°C
Signal Conditioning Temperature	-30°C to 70°C
Inertial Vibration	MIL-STD-810F, additional test OEM specified profiles
Media.....	All media (oxidizing, reducing, corrosive)

* Nominal weight for just the probe assembly, actual weight dependent upon
package configuration.

Electrical

Output Signal Type	Digital
Communications.....	Ethernet (UDP, 320 kbps max)
Power	12-24 VDC, 1.8 W max
Max Sampling Rate	78 ksp/s
EMI	MIL-STD-461F, RE102
Electronics Input Under/Over Voltage.....	<16 VDC, >60 VDC - MIL-STD-704F
Available Optional Interfaces	USB, RS-485, CAN, 0-5 V analog

Applications

- Molten Salt Materials Manufacturing
- Thermal Energy Storage
- Chemical Processing & Manufacturing
- Energy Generation Systems
- Aerospace Propulsion
- Prognostic System Health Monitoring
- Oil & Gas
- R&D



Sporian Microsystems, Inc.

Phone: 303-516-9075

Email: info@sporian.com

Website: sporian.com

515 Courtney Way, Suite B
Lafayette, CO 80026

smartcap.biz